



In Vitro Wall

New

■ F018B22A030 - Black



Designed by Philippe Starck

Lighting unit with diffuse light for exterior wall installation. Integrated opalescent diffuser and external protection in transparent borosilicate glass.

The structure is made of die-cast and extruded aluminium treated with a chemical conversion process for effective resistance to atmospheric agents. The body is powder coated and comes in various finishes.

Integrated LED light source with Edge Lighting optical technology to guarantee perfect uniform lighting. Light source included. Integrated 220-240 V ON/OFF or dimmable electrical power.

110-V version upon request.

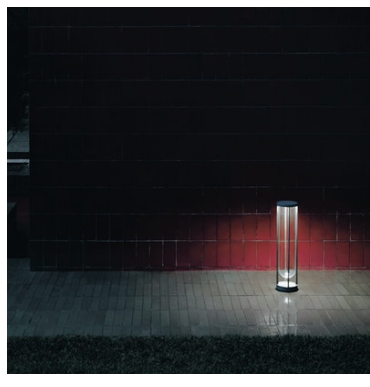


Main specifications

Mounting	Wall	Autoprotected Lamp	No
Environment	Outdoor wet location	Source Power (W)	11
LED type	Edge Lighting	System Flux (lm)	667
Lamp category	LED		
Dimmable	No		

Optical

Lighting Type	Direct
Lighting distribution	Symmetric
CCT (K)	2700K
CRI>	80
Cold Beam Lighting	No
Beam angle C0-180 (°)	111
Beam angle C90-270 (°)	111



Beam Angle: 111°

h(m)	E(lx)	D(m)
1	248	2.89
2	62	5.79
3	28	8.68
4	15	11.57
5	10	14.46

Luminous flux luminaire
667 lm

Electrical

Insulation class	I	Dimmable type	Non Dimmable
Frequency (Hz)	50-60	Emergency Type	No
Main Voltage (Vac)	220-240		
Driver	Integrated		
Dimmable	No		

Physical

Colour	Black	IP external	66
Trim	No		
Orientations	Fixed		
Net weight (kg)	2.2		
IP	66		

Note

We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.


For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges

These effects are frequently caused by:

- over voltage coming from the mains' network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.

In Vitro Wall

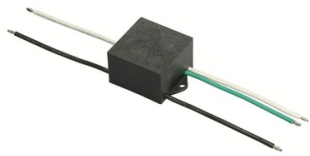

**S.P.D. (SURGE
PROTECTION DEVICE)
F990E00A000**