



Arrangements Drop Down

■ F0413030 - Black

Designed by Michael Anastassiades

Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.

Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.

Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.

Cable length 2.4m





Main specifications

Mounting	Suspension	Lamp holder	LED Module
Environment	Indoor dry location	Dimmable	Yes
Light source type	LED	Autoprotected Lamp	No
Light source replaceable	Replaceable (LED only) light source by a professional	Number of heads	1
	LED type	Source Power (W)	30
	System Flux (lm)		1530

Optical

Lighting Type	Indirect, Direct
Lighting distribution	Symmetric
CCT (K)	2700
Cold Beam Lighting	No
Extreme Cut off	No

F0413030_29W LED

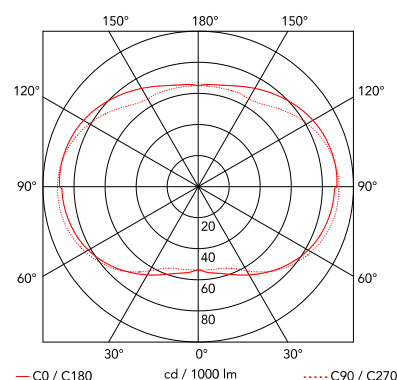


Electrical

Insulation class	III	Batteries Inside	No
Frequency (Hz)	50/60	Dimming Interface	Remote (Dimmer Not Included)
Main Voltage (Vac)	48	Cord length (mm)	2500
Driver	Remote	Charging Min Time	No
Dimmable	Yes		


Physical

Colour	Black
Net weight (kg)	0.65
Gross weight (kg)	1.43
IP	20
IP external	20

Arrangements Drop Down

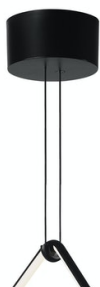

Arrangements Big Rose
F0415030



Arrangements Recessed
Rose
F0418030



Arrangements Small Rose
F0416030