


SKYGARDEN RECESSED

Designed by Marcel Wanders, 2009


F6433009

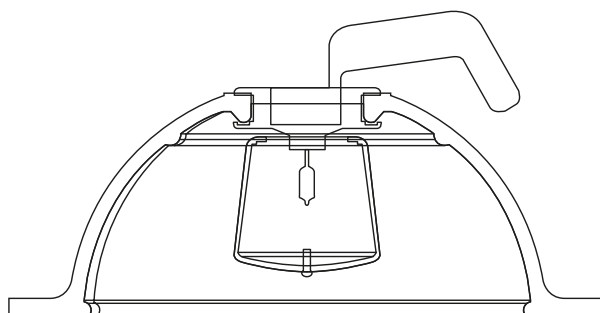

SKYGARDEN RECESSED

F6433009

EN

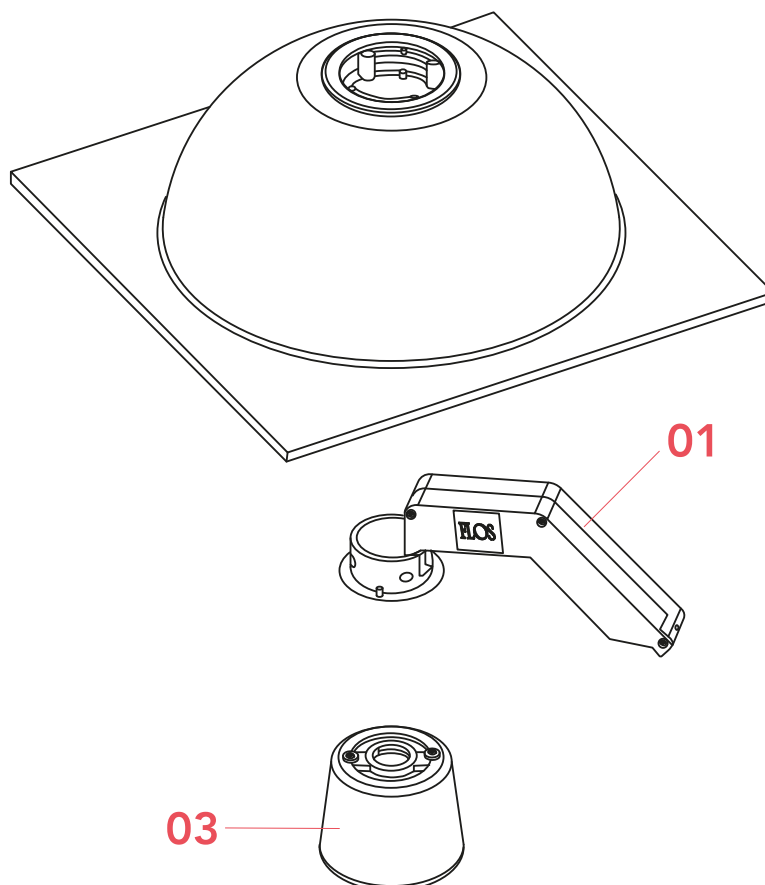


- 01. RF6434000 – Electrical assembly
- 03. RF6430001 – Rcs diffuser assembly

SKYGARDEN RECESSED
F6433009

EN

RF6434000

ELECTRICAL ASSEMBLY

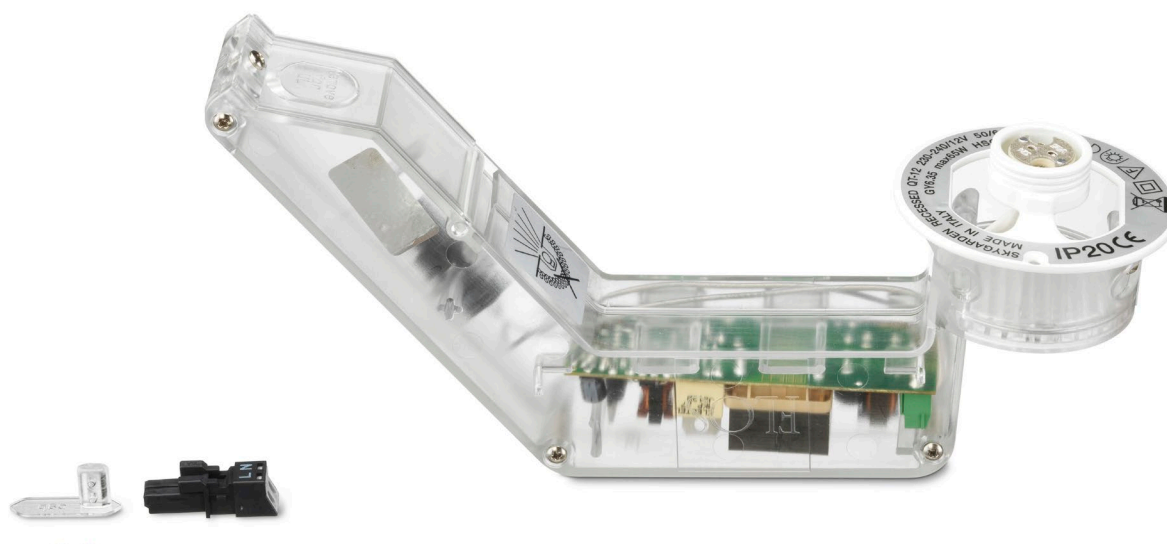

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

SKYGARDEN RECESSED
F6433009

EN

RF6434000

ELECTRICAL ASSEMBLY



Fig.1



Fig.2

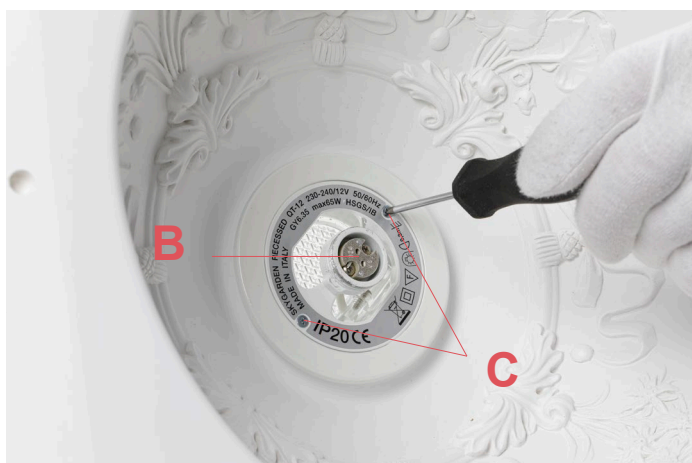


Fig.3

Unfasten the glass diffuser (A) from the lamp body.(Fig.1-2)

Remove the lamp bulb (B) and unfasten the two locking screws (C).(Fig.3)

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

SKYGARDEN RECESSED
F6433009

EN

RF6434000

ELECTRICAL ASSEMBLY



Fig.4



Fig.5

Slide out the damaged electrical assembly (D) from the lamp body.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

SKYGARDEN RECESSED
F6433009

EN

RF6434000

ELECTRICAL ASSEMBLY

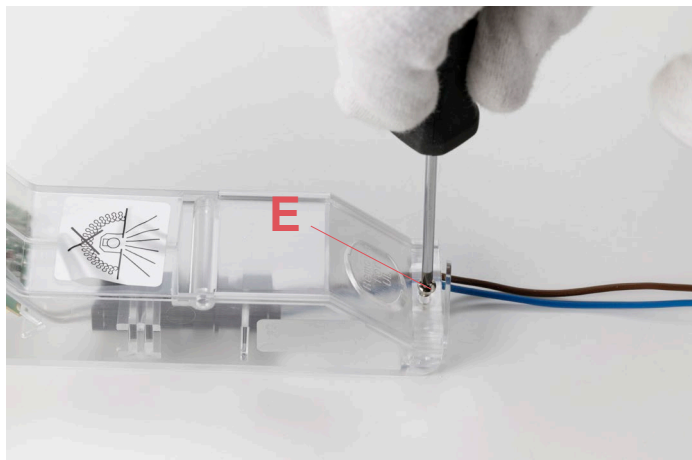


Fig.6

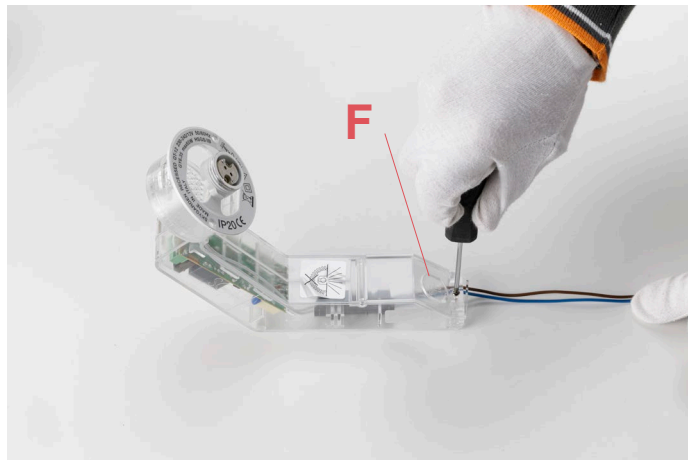


Fig.7



Fig.8

Unfasten the locking screw (E) of the cable clamp and of electrical assembly cover flap (F).(Fig.5-6)

Lift-up the cover and disconnect the feed connector (G) from the damaged electrical assembly.(Fig.8)

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

SKYGARDEN RECESSED
F6433009

EN

RF6434000

ELECTRICAL ASSEMBLY

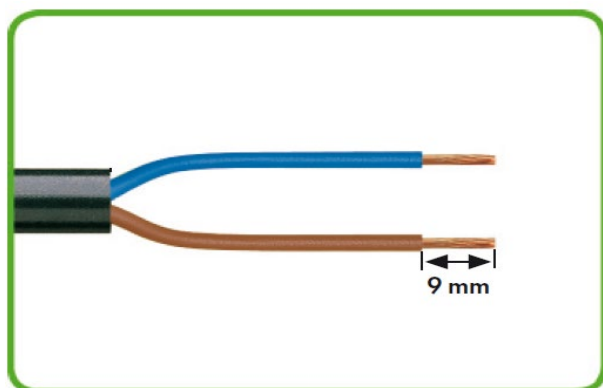
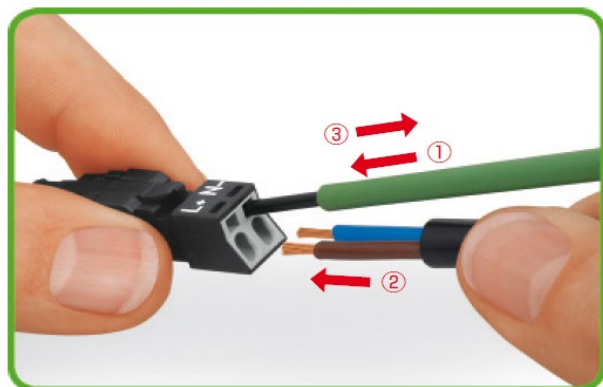
**CAGE CLAMP® S**

Fig.9

If perhaps you decide to connect replace the feed connector, please carry-out the following procedure:

- Strip-off 9 mm of isolation from the wires (max 2 mm²). **Remark!** Do not twist the copper wires.
- Insert a flat thin screw driver inside the cage clamping connect or openings (1), insert the wire (2) and then remove the screw driver (3).

Automatically the wires will lock inside the connector.

In case you need to remove the wires, please carry-out the procedure in the opposite way.

Assemble now the new spare-part:
Connect the connector (G) to the new electrical assembly.(Fig.8 page 6)

Close the flap cover (F) and tighten the screw (E).(Fig.6-7 page 8)

Insert the electrical assembly (D) into the lamp body, ensuring to insert the back part first and then turn until it is completely inserted.(Fig.4-5 page 5)

Fix the electrical assembly to the lamp body by fastening the screws (C). Install the lamp-bulb (B).(Fig.2-3 page 4)

Screw on the diffuser (A) by keeping it perpendicular to the threaded screw (B).
REMARK!!! Screw on the diffuser without forcing. Once reaching the end of the thread loosen slightly to make it easy for a future removal.(Fig.1 page 4)

SKYGARDEN RECESSED
F6433009

EN

RF6430001

GLASS DIFFUSER ASSEMBLY



WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

SKYGARDEN RECESSED
F6433009

EN

RF6430001

GLASS DIFFUSER ASSEMBLY



Fig.4



Fig.5

Install the lamp-bulb then assemble the diffuser (A) on the body by fastening it onto the appropriate threaded screw (B).

REMARK!!! Screw on the diffuser without forcing. Once reaching the end of the thread loosen slightly to make it easy for a future removal.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.